### The Brothers WISP



# **Greg Sowell Consulting**

Mikrotik as the troubleshooting tool

#### Who Am I

- Greg Sowell A+, Network+, CCNA, CCNP, CCIE Written, MTCNA, MTCRE, MTCINE, Mikrotik Certified Trainer
- VP of Technology FIBERTOWN Datacenters
- Consultant GregSowell.com
- Author at Lynda.com/gregsowell

# The Brothers WISP

#### The Brothers WISP.com

- WISP/Network industry scuttlebutt
- Greg Sowell Texas
- Andrew Cox Australia
- Andrew Thrift New Zealand
- Tomas Kirnak Slovakia
- Tom Smyth Ireland
- Mike Hammett Chicago
- JJ Boyd North Carolina
- Alex Heart Oregon
- Justin Miller Virginia
- Justin Wilson Indiana

# Assumptions


- You are familiar with the Mikrotik interface
  - Adding Addresses
  - Adding Static Routes
  - Configuring Interfaces
  - Etc.

### Troubleshoot W/ Mikrotik as Router


- "I can't reach GregSowell.com!"
- 1. Try from my desk
- 2. Ping from router
- 3. Traceroute from router
- 4. Traceroute from customer



### How about now

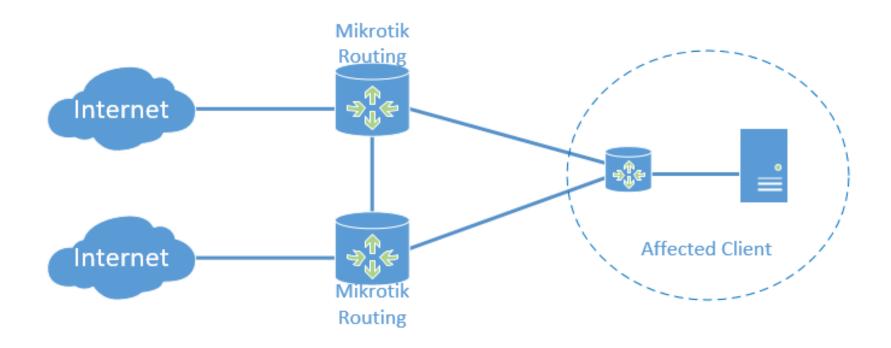


# And now

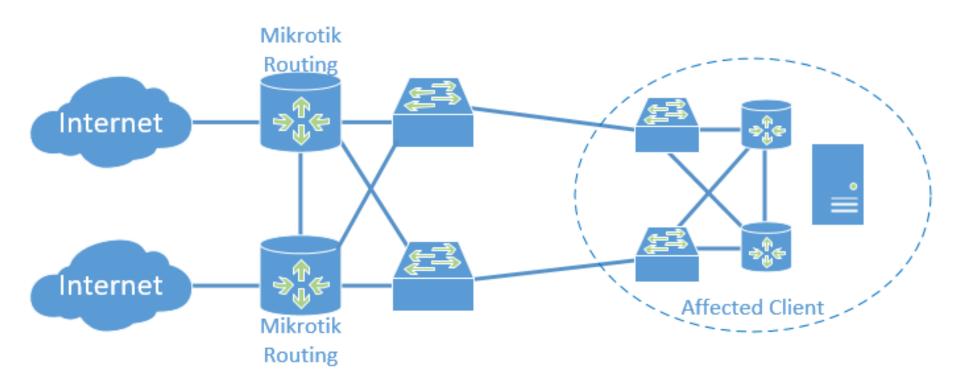


#### Router Is The Failure

- "I can't reach GregSowell.com!"
- NATing issue
- 2. Firewall filter
- 3. Tunnel problem
- 4. Internal routing issue

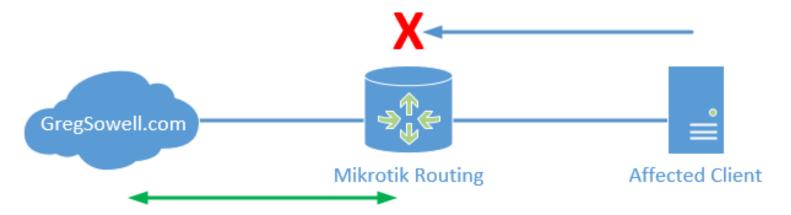


# Utilizing a test Mikrotik

- "I can't reach GregSowell.com!"
- Test outside of network \*if possible\*
- 2. Test at your desk
- 3. Use "Test" Mikrotik
- 4. Test from border

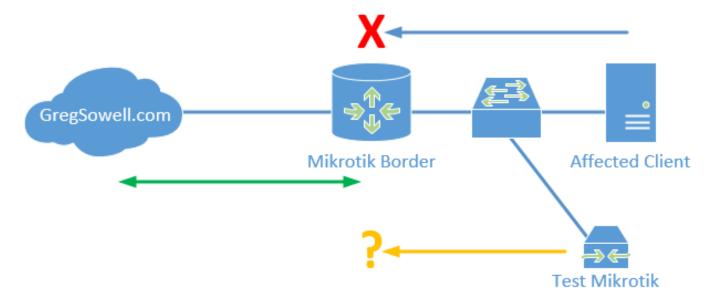


# ICMP Testing

- Can the client ping the resource (developed in 1983)
- Collect Trace Routes (1987) from client (both directions if possible), test Mikrotik, border, outside resource

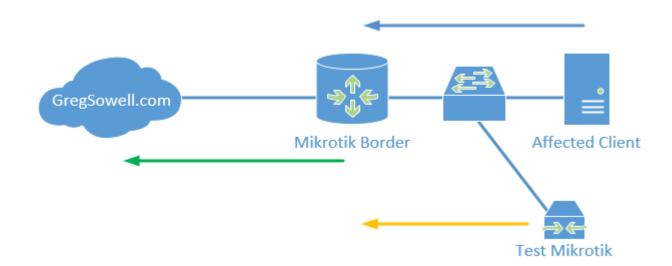


#### ICMP Results

Tracerout	e (Run	ning)									
Tracerou	ite To:	gregsowell.com									
Packe	t Size:	56									
Tìr	meout:	1000									_
Protocol: Port:		icmp									
		33434									
		Use DNS									
	Count:										
,	Courit.										
Max	Hops:										
Src. Ad											
Src. Ad	iaress:										
Inte	erface:										
ı	DSCP:										
Routing	Table:										
	Host		Loss	Sent	Last	Avg.	Best	Worst	Std. Dev.	History	5
1			100.0%		timeout						
_		19.229.76	0.0%		10.5ms	12.8	8.3	21.6	3.7		
_		19.241.242	0.0%		16.5ms	16.5	12.1	32.3	4.8		_
		19.227.49	32.3%		498.3ms	534.8	477.8	668.6	444.5		4
_		48.90.101	0.0%		13.5ms	16.1	12.1	28.8	4.2		-
		48.102.198	0.0%		31.9ms	27.3	16.0	138.9	26.2		_
		39.244.90	0.0%		38.2ms	28.8	16.8	234.7	37.9		+
		39.228.152	0.0%		33.0ms	19.0		33.0	3.4		+
9	209.18	39.228.152	0.0%	31	18.9ms	20.4	15.2	35.7	4.8		

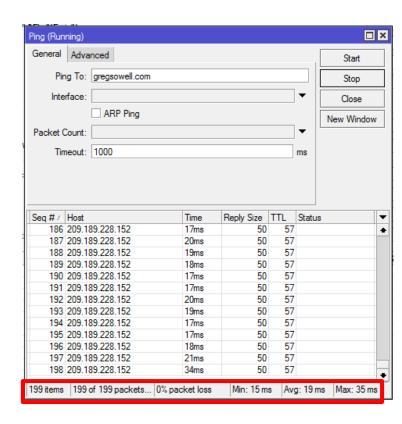

# Multiple Gateways

- Test to failed resource
- Test to affected client

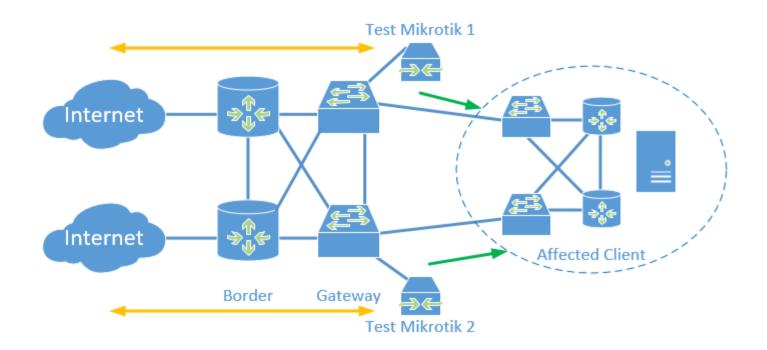


## Telnet for TCP Port Testing

- Telnet to address on perspective port – desk, test mtk, border
  - Good for plain text protocols especially – www, telnet, SMTP, etc.
  - This can be paired with torch/packet sniffer to show two way communication.
  - Doesn't 100% duplicate the experience

```
10.255,200.1 - PuTTY
[admin@test-desk] /system> telnet gregsowell.com 80
Trying 209.189.228.152...
Connected to 209.189.228.152.
Escape character is '^|'.
HTTP/1.1 400 Bad Request
Server: nginx
Date: Wed, 17 May 2017 19:56:00 GMT
Content-Type: text/html; charset=UTF-8
Content-Length: 166
Connection: close
<head><title>400 Bad Request</title></head>
<body bgcolor="white">
<center><h1>400 Bad Request</h1></center>
<hr><center>nginx</center>
</body>
Connection closed by foreign host.
```


# Testing Via VPN Tunnel

Security isn't a concern, just test the resource (PPTP, L2TP, SSTP, whatever works)

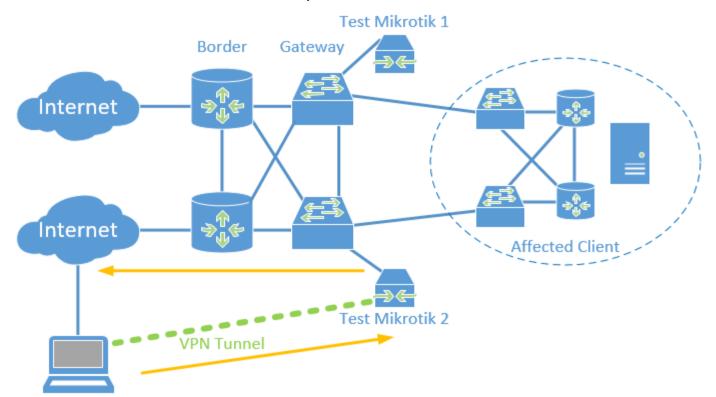


#### Test WiFi

- The WiFi is down...or nah?
- Scan function to look for other APs/look at frequency utilization
- Utilizing a VRF for network segregation

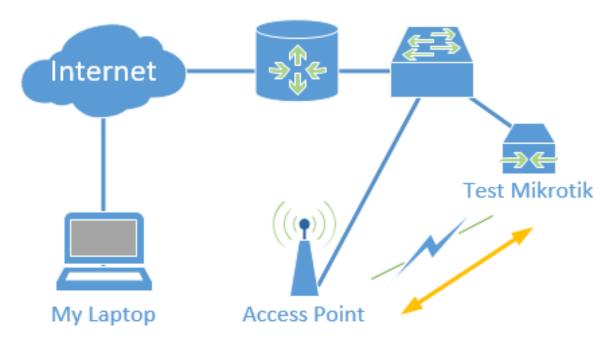


#### Test WiFi

- Put WLAN1 into a VRF with routing mark "wifi-test"
- Add DHCP client to run on WLAN1 interface
- Add masquerade rule for WLAN1 interface
- Connect WLAN1 to the SSID/AP in need of testing

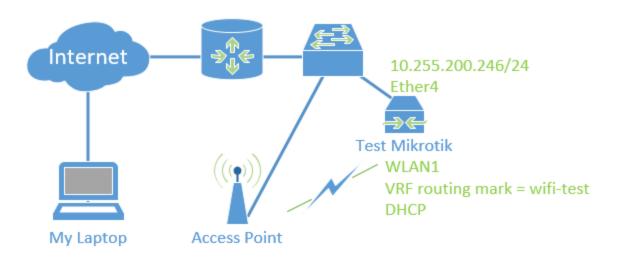


### WiFi Test Demo

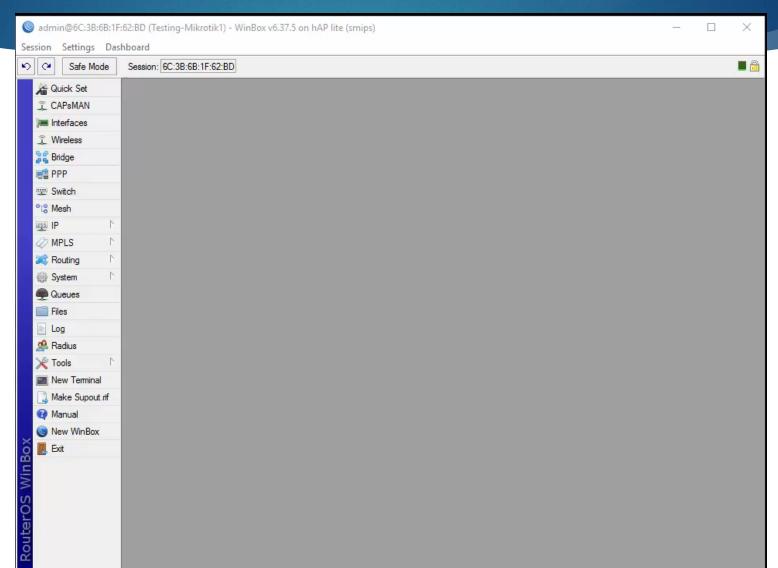


## WiFi Test W/VPN Tunnel

Test from the router like any WiFi client

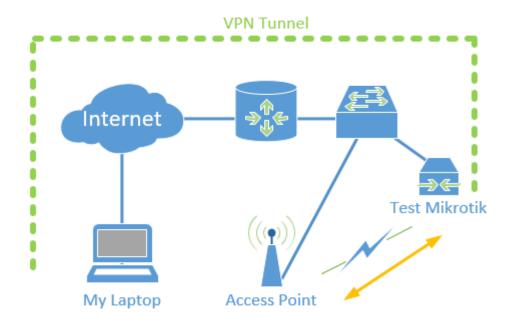


### WiFi Test W/VPN Tunnel

- Enable pptp server
- Create ppp secret for testing/edit default-encryption profile
- Create pptp server interface "pptp-wifi-test"
- Add pptp interface to VRF

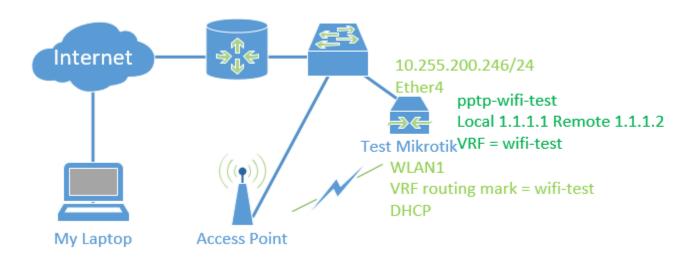


### WiFi VPN Test Demo

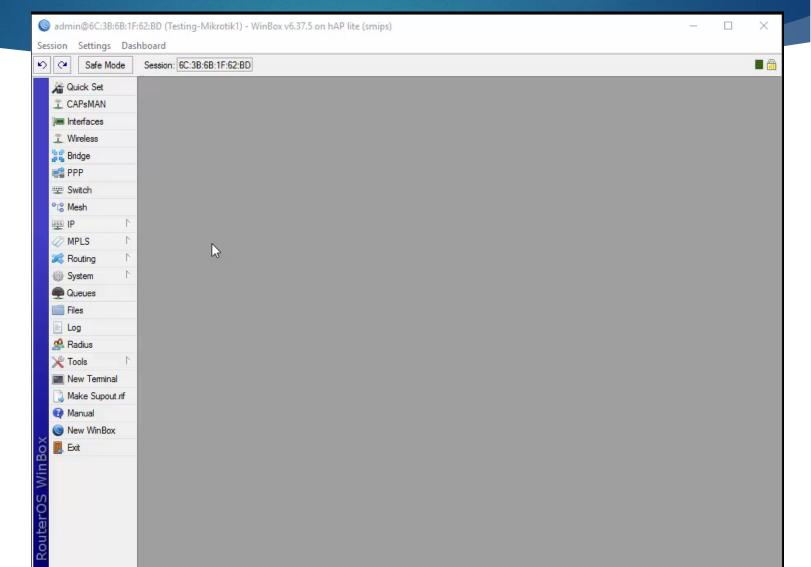


# Utilize Out-Of-Band Management

- Allows for access to network during severe issues
- Use VRF for non-OOB interface(similar to wifi test config)
  - Ethernet in VRF instead of WLAN1

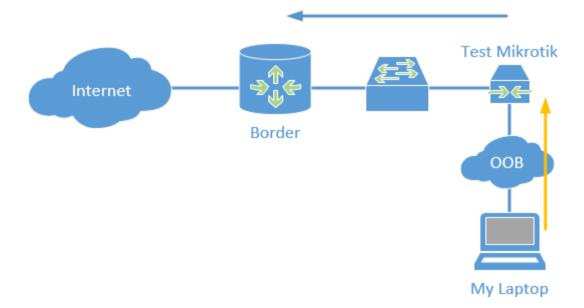


#### Mikrotik As Serial Console

- Connect Mikrotik serial port to another device
  - Available via CLI or direct access
- Disable serial port in system console
- Connect to system-terminal
- Ctrl-A + q quits
- Ctrl-A + r changes rates

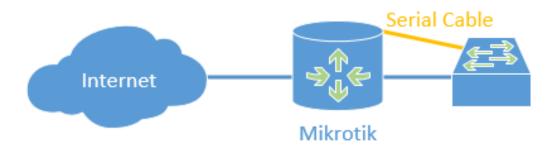


### Serial Console Demo

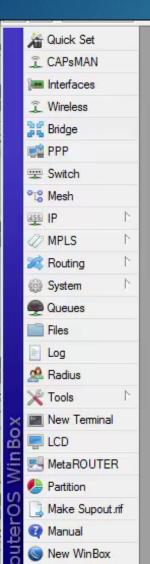


### Probe Test Mikrotiks

Probe test Mikrotiks via internal/external NMS

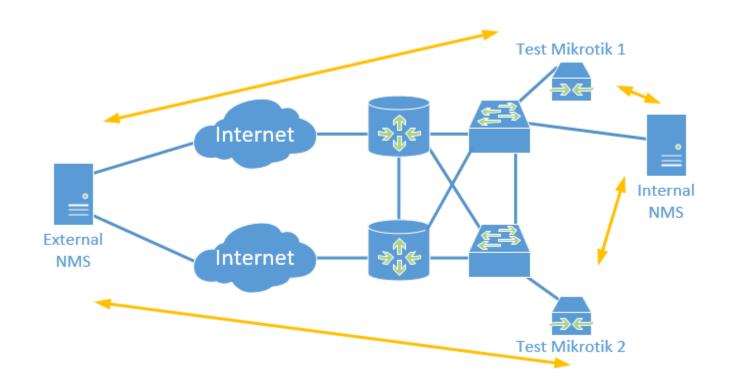


# L2 Troubleshooting

- Communications issue on L2 segment
  - Not through router, how to test?

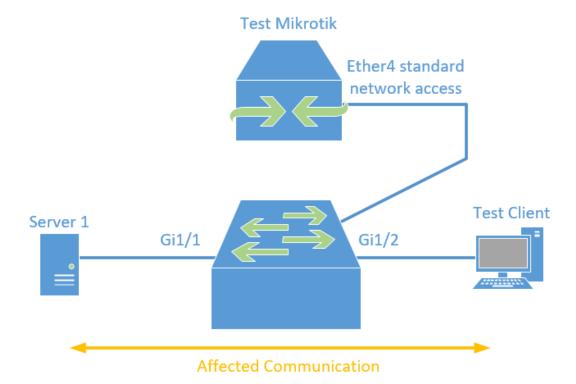


#### Sniff Mirrored Switch Traffic

- Configure Mirror/SPAN on switch
- Torch on Mikrotik
- Packet Sniff on Mikrotik

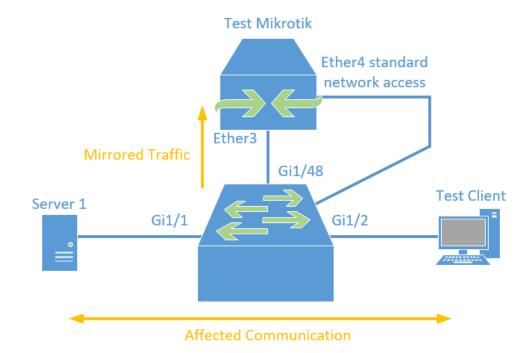


### Sniff Mirrored Demo

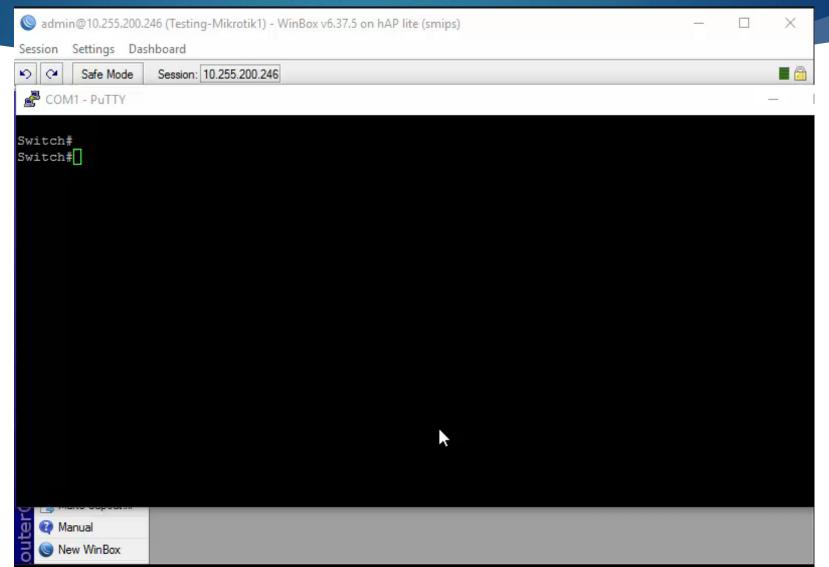

# RSPAN – Remote Mirroring

Mirror any LAN switchport to the collection port of test Mikrotik

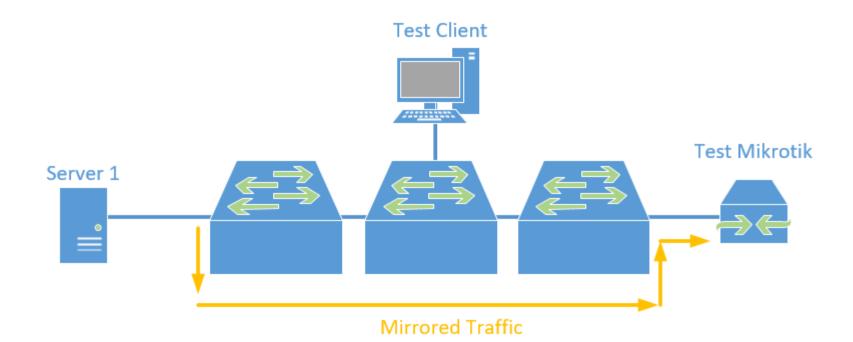

# Questions?

One last thing, shake my hand, tell me your story, and buy the brothers a beer!

Thanks and happy routing!

#### Resources

- Greg's Blog
  - http://GregSowell.com
- ► The Brothers WISP
  - http://thebrotherswisp.com/
- Link to script files
  - ► <a href="http://gregsowell.com/files/MUM2016Scripts.zip">http://gregsowell.com/files/MUM2016Scripts.zip</a>